

HL-LHC layout for fixed-target experiments in ALICE based on crystal-assisted beam halo splitting

Marcin Patecki*

Warsaw University of Technology, Faculty of Physics, ul. Koszykowa 75, 00-662 Warsaw, Poland.

Alex Fomin, Daniele Mirarchi, and Stefano Redaelli

European Organization for Nuclear Research (CERN), CH-1211 Geneva 23, Switzerland

(Dated: October 25, 2022)

The Large Hadron Collider (LHC) at the European Organization for Nuclear Research (CERN) is the world's largest and most powerful particle accelerator colliding beams of protons and lead ions at energies up to 7 TeV and 2.76 TeV, respectively. ALICE is one of the detector experiments optimised for heavy-ion collisions. A fixed-target experiment in ALICE is considered to collide a portion of the beam halo, split using a bent crystal, with an internal target placed a few meters upstream of the detector. Fixed-target collisions offer many physics opportunities related to hadronic matter and the quark-gluon plasma to extend the research potential of the CERN accelerator complex. Production of physics events depends on the particle flux on the target. The machine layout for the fixed-target experiment is developed to provide a flux of particles on the target high enough to exploit the full capabilities of the ALICE detector acquisition system. This paper summarises the fixed-target layout consisting of the crystal assembly, the target and downstream absorbers. We discuss the conceptual integration of these elements within the LHC ring, the impact on ring losses, and expected performance in terms of particle flux on target.

I. INTRODUCTION

Advancements in the knowledge of fundamental constituents of matter and their interactions are usually driven by the development of experimental techniques and facilities, with a significant role of particle accelerators. The Large Hadron Collider (LHC) [1] at the European Organization for Nuclear Research (CERN) is the world's largest and most powerful particle accelerator colliding opposite beams of protons (p) and lead ions (Pb), allowing for unprecedentedly high centre-of-mass energies of up to 14 TeV and 5.5 TeV, respectively. The ALICE fixed-target (ALICE-FT) programme [2] is proposed to extend the research potential of the LHC and the ALICE experiment [3]. A significant innovation of our proposal is to bring particles of high energy collider to collisions with a fixed-target by deflecting them using a bent crystal, similar to crystals being developed for beam collimation at the LHC [4–6]. This technique allows profiting from the circulating beam halo particles that are usually considered useless, or even harmful, from the collider's perspective. Splitting the beam is performed by exploiting the channelling process occurring inside a bent crystal, resulting in a trajectory deflection equivalent to the geometric bending angle of the crystal body [7].

Fixed-target collisions in the LHC are designed to be operated simultaneously with regular head-on collisions without jeopardising their efficiency. Several unique advantages are offered with the fixed-target mode compared to the collider mode. With a high density of targets, high yearly luminosities can be easily achieved, comparable

with luminosities delivered by the LHC (in the collider mode) and Tevatron [8]. In terms of collision energy, the ALICE-FT layout would provide the most energetic beam ever in the fixed-target mode with the centre of mass energy per nucleon-nucleon of 115 GeV for proton beams and 72 GeV for lead ion beams [8], in between the nominal Relativistic Heavy Ion Collider (RHIC) and Super Proton Synchrotron (SPS) energies. Thanks to the boost between the colliding-nucleon centre-of-mass system and the laboratory system, access to far backward regions of rapidity is possible with the ALICE detector, allowing to measure any probe even at far ranges of the backward phase space, being utterly uncharted with head-on collisions [8]. Moreover, the possibility of using various species of the target material extends the variety of physics cases, especially allowing for unique neutron studies [8]. The physics potential [2, 8] of such a fixed-target programme covers an intensive study of strong interaction processes, quark and gluon distributions at high momentum fraction (x), sea quark and heavy-quark content in the nucleon and nucleus and the implication for cosmic ray physics. The hot medium created in ultra-relativistic heavy-ion collisions offers novel quarkonium and heavy-quark observables in the energy range between the Super Proton Synchrotron (SPS) and the Relativistic Heavy Ion Collider (RHIC), where the QCD phase transition is postulated.

The problem that we address is to design the machine layout that provides a number of protons on the target high enough to exploit the full capabilities of the ALICE detector acquisition system without affecting the LHC availability for regular beam-beam collisions. Our proposal of the ALICE-FT layout [9] follows general guidelines on technical feasibility and impact on the LHC accelerator of potential fixed-target experiments provided

* Marcin.Patecki@pw.edu.pl

by the LHC Fixed Target Working Group of the CERN Physics Beyond Colliders forum [10, 11]. We also profit from the preliminary designs reported in [12, 13] and from the design study of an analogous fixed target experiment at the LHC proposed to measure electric and magnetic dipole moments of short-lived baryons [14]. In this paper, we summarise the ALICE-FT machine layout. We report on the conceptual integration of its elements (crystal and target assemblies, downstream absorbers), their impact on ring losses, and expected performance in terms of particle flux on target. We also discuss a method of increasing the flux of particles on the target by setting the crystal at the optimal betatron phase by applying a local optics modification in the insertion hosting the ALICE experiment (IR2). This method is independent of the crystal location, allowing for a crystal installation in a place with good space availability. Moreover, it allows to recover the maximum performance of the system in case of changes in beam optics in the LHC.

II. MACHINE CONFIGURATION

A potential installation of the ALICE-FT setup will coincide with a major LHC upgrade in terms of instantaneous luminosity, commonly referred to as the High-Luminosity LHC (HL-LHC) [15], taking place in the Long Shutdown 3 (2025-2027), to make it ready for Run4 starting in 2027. Some of the expected beam parameters, having a direct impact on the ALICE-FT experiment performance, are given in Table I. Among beam parameters being a subject of the upgrade, we highlight the total beam current increase nearly by a factor of two, up to about 1.1 A, leading to more than 0.7 GJ of total beam energy stored in the machine. A highly efficient collima-

TABLE I. Some parameters of the future HL-LHC beams important for the ALICE-FT experiment, referred to as *standard* in [15].

Beam energy in collision	E	7 TeV
Bunch population	N_b	$2.2 \cdot 10^{11}$
Maximum number of bunches	n_b	2760
Beam current	I	1.09 A
Transverse normalised emittance	ε_n	2.5 [μm]
β^* at IP2		10 m
Beam crossing angle at IP2		200 μrad

tion system is therefore present in the LHC [16] to protect its elements, especially superconducting, from impacts of particles from the beam. The collimation system is organised in a precise multi-stage hierarchy (see Table II) over two dedicated insertions (IRs): IR3 for momentum cleaning and IR7 for betatron cleaning. Each collimation insertion features a three-stage cleaning based on primary collimators (TCP), secondary collimators (TCSG) and absorbers (TCLA). In addition, dedicated collima-

tors are present in specific locations of the ring to provide protection of sensitive equipment (e.g. TCTP for the inner triplets), absorption of physics debris (TCL) and beam injection/dump protection (TDI/TCDQ-TCSP). The collimation system undergoes an upgrade, as described in [17], to make it compatible with HL-LHC requirements, but the general working principle will remain the same.

TABLE II. HL-LHC collimation settings expressed in units of RMS beam size (σ), assuming a gaussian beam distribution and transverse normalised emittance $\varepsilon_n = 2.5 \mu\text{m}$.

Coll. family	IR	Settings (σ)
TCP/TSCG/TCLA	7	6.7/9.1/12.7
TCP/TSCG/TCLA	3	17.7/21.3/23.7
TCT	1/2/5/8	10.4/43.8/10.4/17.7
TCL	1/5	14.2
TCSP/TCDQ	6	10.1/10.1

The halo splitting scheme is to be embedded into the transverse hierarchy of the betatron collimation system, in between the primary and secondary stage of IR7 collimators, such that the collimation system efficiency is not affected. A fraction of secondary halo particles redirected toward the target can be used for fixed-target collisions instead of disposing them at the absorbers.

III. ALICE-FT LAYOUT

A general concept of the ALICE-FT layout is illustrated in Fig. 1. A fraction of secondary halo particles are intercepted by the crystal and steered toward the target. Collision products are registered by the ALICE detector, which can handle in the order of 10^7 protons on target per second [8]. Possible losses originating either from the crystal or from the target are intercepted by downstream absorbers.

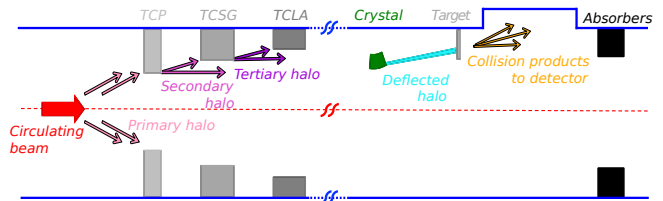


FIG. 1. Working principle of the crystal-based fixed-target experiment (right side of the graphics) being embedded into the multi-stage collimation system (left side of the graphics). Graphics based on [14], mostly by D. Mirarchi.

The ALICE-FT will act on B1 due to ALICE detector geometry. We assume the layout to be operated with the optics envisioned for the HL-LHC (version 1.5 [18] at

the moment), as the overhead would become too large if new optics needs to be commissioned. However, as will be shown later, a minor, local modification of the optics in the IR2 region is proposed to enhance the system performance by optimising the betatron oscillation phase at the location of the crystal. This will have no effect on the rest of the machine.

The effect of the system on the global cleaning properties of the collimation system will be minimised by setting the crystal in the shadow of IR7 primary collimators. As discussed in [14], the relative retraction of the crystal with respect to the IR7 primary collimator should not be smaller than 0.5σ (RMS beam size), mostly to account for optics and orbit errors, but it should be kept as low as possible to maximise the number of protons impacting the target [11], see Fig. 7. Similarly to [14], we also assume that, for machine safety reasons, the distance from the deflected beam to the aperture and the distance from the target to main beams should be at least 4 mm. The system is to be installed in the vertical plane in order to avoid issues related to the beam dump system operating in the horizontal plane; otherwise, larger margins on settings would be required. The beams crossing scheme at IP2 is also in the vertical plane. Furthermore, the main solenoid of the ALICE detector can be operated in two polarities which affect the slope of both beams at IP2. We mark the negative slope of the LHC beam 1 (B1) at IP2 as *negX* and the positive slope as *posX*. Given the trajectory of the B1 for both crossing schemes (*negX* and *posX*), aperture restrictions and space availability, the optimal longitudinal coordinate for the crystal installation is 3259m (with 0 at IP1) as it allows for having just one crystal serving both crossing schemes. The graphical illustration of the proposed layout, which fulfils all the above requirements, is given in Fig. 2 and conditions inside the LHC tunnel are depicted in Fig. 3.

We consider a crystal made of silicon, with 110 bending planes and a bending radius of 80 m, the same as a bending radius of crystals already used in the LHC, following the parametric studies reported in [5] to ensure an optimum crystal channelling performance at the LHC top energy while keeping the nuclear interaction rate as low as possible. The crystal bending angle of $200 \mu\text{rad}$ is chosen to serve both crossing schemes and to fit the deflected beam within the available aperture. Any upstream location of the crystal would require having two crystals with different bending angles, depending on the crossing scheme.

The target assembly is planned to be installed nearly 5 m upstream from IP2 with a target made of either light or heavy material, e.g. carbon or tungsten of about 5 mm in length. Details on target design studies can be found in [19].

Four absorbers, of the same design as collimators already used in the LHC, are proposed to be installed about 150 m downstream from the IP2. The first three are proposed to be made of 1 m long carbon-fibre-carbon composite jaws, as the present TCSGs in the LHC, while the

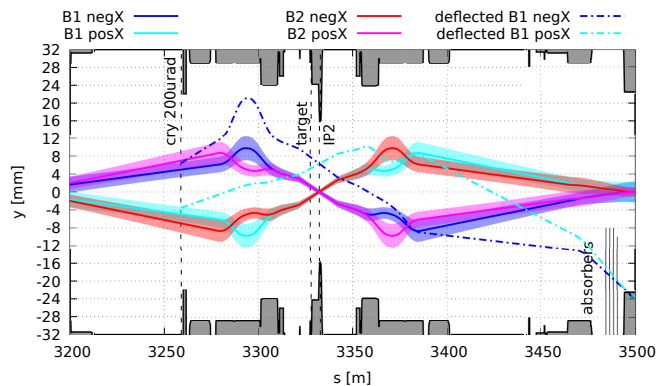


FIG. 2. The proposed layout of the ALICE-FT experiment. Both beams (B1 and B2) with their envelopes (7.3σ) are given with solid lines for both ALICE solenoid polarities (*posX* and *negX*). Deflected beams are given in dashed blue lines. The machine aperture is given in solid black lines. Vertical dashed lines mark the locations of crystals, target and IP2, respectively. The location of absorbers is marked in the right bottom corner.

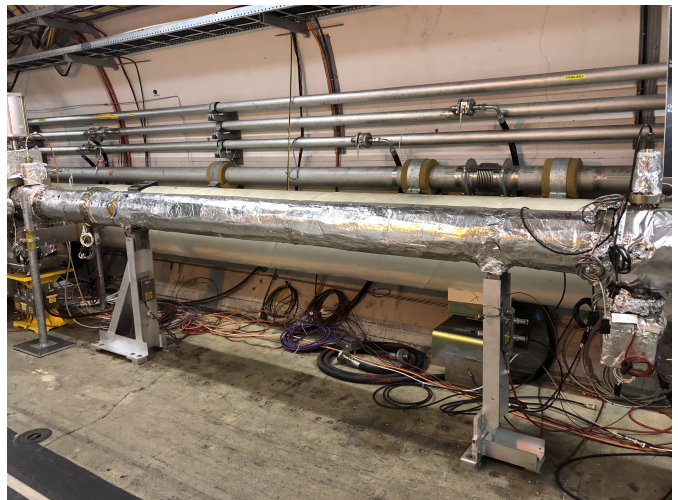


FIG. 3. Conditions inside the LHC tunnel at the proposed location for an installation of the crystal.

last one is to be made of 1 m long tungsten jaws, as the present TCLAs in the LHC; similarly as in [14]. The difference is that in our study we use a maximum opening of about 50σ that still intercepts the channelled beam to keep the absorbers in the shadow of the entire collimation system and therefore to minimise their impact on the regular collimation system and on the machine impedance, instead of searching for minimum gaps that maintain the collimation hierarchy. As will be shown later, we do not experience any issues related to cleaning. The proposed setup of absorbers follows a performance-oriented approach with the potential to reduce the number of required absorbers, based on the energy deposition study to be done in the future.

The main parameters of the proposed layout are sum-

marised in Table III.

TABLE III. Main parameters of the ALICE-FT layout.

	position [m]	length [cm]	material	half-gap [mm]	bending angle [μ rad]
crystal	3259	1.6	Si	1.4	200
target	3327.6	(5,10)	C/W	6.5	—
absorber1	3484.4	100	C	9.9	—
absorber2	3486.4	100	C	10.3	—
absorber3	3488.4	100	C	10.7	—
absorber4	3490.4	100	W	12.4	—

IV. EXPECTED PERFORMANCE

The MAD-X code [20] is used to manage the HL-LHC model, to prepare suitable lattice and optics descriptions used as input to tracking studies, and to calculate the trajectory of particles experiencing an angular kick equivalent to the crystal bending angle. Detailed evaluation of the layout performance is done using multi-turn particle tracking simulations in SixTrack [21] that allows a symplectic, fully chromatic and 6D tracking along the magnetic lattice of the LHC, including interactions with collimators and bent crystals, and a detailed aperture model of the machine [22]. In our simulations, we use at least two million protons, initially distributed over a narrow ring of radius $r + dr$ slightly above 6.7σ in the normalised transverse vertical position-angle phase space (y, y') which allows an estimation of the number of protons impacting the collimation system (including the crystal and the target of the ALICE-FT layout) as well as the density of protons lost per metre in the aperture with a resolution of 10 cm along the entire ring circumference.

The ALICE-FT experiment must be compatible with the standard physics programme of the LHC, meaning that it cannot add any operational limitations, mostly related to particle losses, which must stay within acceptable limits. This is demonstrated in Fig. 4 where a loss map of the machine including the ALICE-FT system does not contain any abnormal loss spikes comparing to the reference loss map of the machine without the ALICE-FT system. The only new spikes correspond to protons impacting the elements of the ALICE-FT setup. The setup is developed to provide as many as possible protons impacting the crystal (N_{PoC}) which strongly depends on the betatron oscillation phase advance between the primary vertical collimator at IR7 and the IR2 crystal. With the nominal optics, the phase advance is nearly least favourable leading to a low N_{PoC} . This can be corrected by a minor, local modification of the IR2 optics, implemented by changing strengths of IR2 quadrupole magnets labelled with natural numbers from 4 to 10 (lower the number, closer the magnet to the IP2), on both sides of the IP2. Quadrupoles upstream of the IP2 were

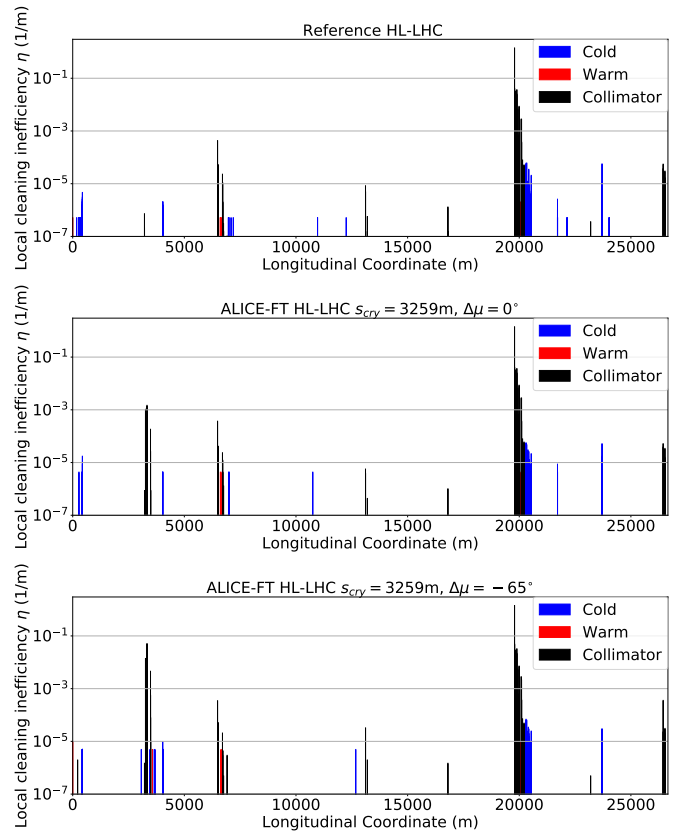


FIG. 4. Comparison of loss maps for the machine without (top) the ALICE-FT system, with the ALICE-FT system without the optics optimisation (middle) and with the ALICE-FT system with the optics optimisation (bottom). The local cleaning inefficiency (vertical axis) is a measure of the number of protons not intercepted by the collimation system and impacting the machine aperture. The simulation limit of 1 proton lost in the machine aperture corresponds to $5 \cdot 10^{-7} \text{m}^{-1}$ in a 10 cm longitudinal bin. No abnormal loss spikes are present in the loss maps.

constrained only to shift the phase advance at the crystal while keeping the IP2 optics parameters unchanged. Quadrupoles downstream of the IP2 were constrained to recover the same optical parameters, including the betatron phase, as in the nominal optics. The maximum N_{PoC} was found for phase advance shifted by -65° , as shown in Fig. 5. The corresponding optical β_y function in IR2 is given in Fig. 6 and changes in strengths of quadrupoles are summarised in Table IV.

With tracking simulations, we have estimated a fraction of protons hitting the target over all protons intercepted by the collimation system (PoT) as a function of crystal retraction, see Fig. 7. This is used a scaling factor in estimating the total number of protons hitting the target per LHC fill (N_{PoT}) or a flux of protons on target per second. The N_{PoT} also scales with the number of protons impacting primary collimators at IR7 (see Eq. 1), which depends on the beam intensity being a complex function of time, discussed in more detail in [14]. An exponential

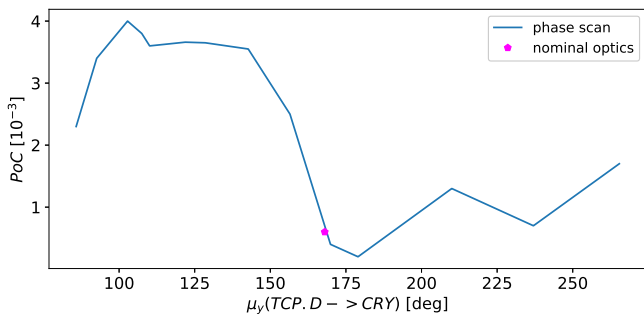


FIG. 5. The dependence of the fraction of the number of protons impacting the crystal over the number of protons impacting the primary collimator (PoC) on the betatron phase from the primary vertical collimator in IR7 (TCP.D) to the IR2 crystal (CRY). Crystal retraction is 7.9σ .

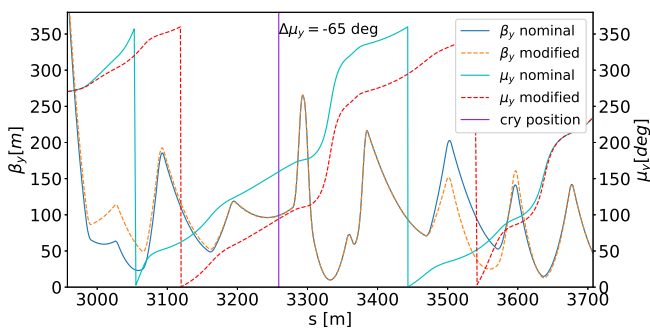


FIG. 6. Vertical β function and betatron phase for nominal (solid lines) and modified (dashed lines) optics. Position of the crystal is marked with a vertical purple line.

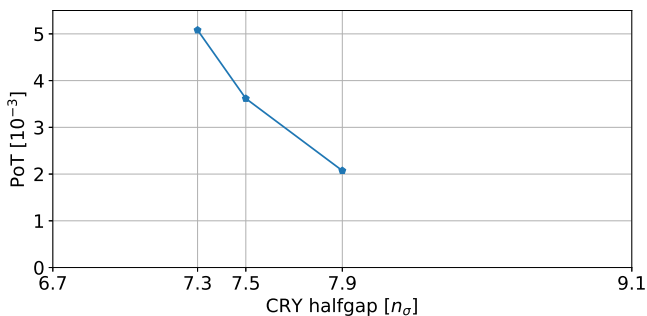


FIG. 7. Fraction of the number of protons impacting the target over the number of protons impacting the primary collimator (PoT) for some values of crystal half-gap expressed as the number of beam sigma. Limits of the horizontal axis correspond to half-gaps of primary and secondary collimators in IR7.

decrease of the beam intensity is assumed, characterised by the time coefficient τ interpreted as a beam lifetime, which depends on beam parameters and machine state. A dominant contribution to the total beam lifetime comes from the beam burn-off due to collisions (τ_{BO}), while

TABLE IV. Normalised strengths of quadrupoles for nominal and modified optics. IR2 left and IR2 right stand for regions upstream and downstream from the IP2, respectively.

Quadrupole number	Quadrupole strength k_1 [10^{-3} m^{-2}]			
	IR2 left		IR2 right	
	nominal	modified	nominal	modified
10	-6.39	-6.15	7.30	7.30
9	7.01	6.89	-6.60	-6.82
8	-5.41	-3.59	6.71	6.30
7	7.60	7.42	-6.36	-7.47
6	-4.91	-4.17	4.33	4.20
5	2.99	2.88	-3.63	-4.09
4	-2.80	-2.67	3.74	2.60

the N_{PoT} depends mostly on τ_{coll} corresponding to beam core depopulation towards tails that are intercepted by the collimation system. Following the same assumptions as in [14], with I_0 being the initial beam intensity, time coefficients $\tau_{BO} \approx 20\text{h}$ and $\tau_{coll} \approx 200\text{h}$, the number of protons impacting the target per 10 h long fill (T_{fill}) in 2018 operation conditions can be estimated as:

$$N_{PoT} = \frac{1}{2} P o T \int_0^{T_{fill}} \frac{I_0}{\tau_{coll}} \exp\left(-\frac{t}{\tau_{BO}}\right) \exp\left(-\frac{t}{\tau_{coll}}\right) dt \approx 2.7 \times 10^{10}. \quad (1)$$

This corresponds to the flux of protons on target of about 7.6×10^6 p/s being very close to the design goal of 10^7 p/s. These two numbers are summarised in Table V. Please also note that the intensity of HL-LHC beams will be about a factor of two larger resulting in a larger proton flux on target than what is expected based on beam conditions in 2018.

V. CONCLUSIONS AND OUTLOOK

In this paper, we summarise the layout for ALICE fixed-target experiments based on crystal-assisted beam halo splitting. We have demonstrated that it can be operated safely without affecting the availability of the LHC for regular beam-beam collisions. Moreover, the estimated proton flux on target reaches the design goal of

TABLE V. Expected proton flux on target based on 2018 operation conditions compared with expected capabilities of ALICE detector acquisition system. The first number may grow up to a factor of 2 for HL-LHC conditions, due to two times larger initial beam intensity.

	proton flux on target [p/s]
estimated for the proposed layout	7.6×10^6
ALICE acquisition system	10^7

nearly 10^7 allowing to exploit the full capabilities of the ALICE detector acquisition system.

VI. ACKNOWLEDGEMENTS

We thank for the support provided by members of the ALICE Fixed-Target Project meetings [23] and Physics Beyond Colliders Fixed-Target Working Group [24], es-

pecially D. Kikoła, C. Hadjidakis, L. Massacrier and M. Ferro-Luzzi. We also want to acknowledge W. Scandale and F. Galluccio for their work on beam splitting in IR2.

This research has received funding from the European Union’s Horizon 2020 research and innovation programme, project number: 101003442. This research was also funded in part by National Science Centre, Poland, project number: 2021/43/D/ST2/02761.

-
- [1] O. S. Brüning *et al.*, *LHC Design Report*, ser. CERN Yellow Reports: Monographs. Geneva: CERN, 2004. <http://cds.cern.ch/record/782076>
- [2] F. Galluccio *et al.*, “Physics opportunities for a fixed-target programme in the ALICE experiment”, Apr 2019. <https://cds.cern.ch/record/2671944>
- [3] K. Aamodt *et al.*, “The ALICE experiment at the CERN LHC. A Large Ion Collider Experiment”, *JINST*, vol. 3, p. S08002. 259 p, 2008, also published by CERN Geneva in 2010. <https://cds.cern.ch/record/1129812>
- [4] W. Scandale *et al.*, “Observation of channeling for 6500 GeV/c protons in the crystal assisted collimation setup for LHC”, *Physics Letters B*, vol. 758, pp. 129–133, 2016. <https://www.sciencedirect.com/science/article/pii/S0370269316301514>
- [5] Mirarchi, D., Hall, G., Redaelli, S., and Scandale, W., “Design and implementation of a crystal collimation test stand at the Large Hadron Collider”, *Eur. Phys. J. C*, vol. 77, no. 6, p. 424, 2017. <https://doi.org/10.1140/epjc/s10052-017-4985-4>
- [6] Redaelli, S. *et al.*, “First observation of ion beam channeling in bent crystals at multi-TeV energies”, *Eur. Phys. J. C*, vol. 81, no. 2, p. 142, 2021. <https://doi.org/10.1140/epjc/s10052-021-08927-x>
- [7] A. M. Taratin, “Particle channeling in a bent crystal”, *Physics of Particles and Nuclei*, vol. 29, no. 5, pp. 437–462, Sep. 1998.
- [8] C. Hadjidakis *et al.*, “A fixed-target programme at the LHC: Physics case and projected performances for heavy-ion, hadron, spin and astroparticle studies”, *Physics Reports*, vol. 911, pp. 1–83, 2021. <https://www.sciencedirect.com/science/article/pii/S0370157321000405>
- [9] M. Patecki, A. Fomin, D. Kikoła, D. Mirarchi, and S. Redaelli, “Status of Layout Studies for Fixed-Target Experiments in Alice Based on Crystal-Assisted Halo Splitting”, *Proceeding to the 64th ICFA Advanced Beam Dynamics Workshop, MOP26*. <https://doi.org/10.18429/JACoW-HB2021-MOP26>
- [10] Kickoff meeting for the Physics Beyond Collider study, March 2016. <https://indico.cern.ch/event/523655>
- [11] C. Barschel *et al.*, “LHC fixed target experiments”, CERN, Geneva, Tech. Rep., Mar 2019. <https://cds.cern.ch/record/2653780>
- [12] F. Galluccio, “UA9 proposal for beam splitting in IR2”, FTE@LHC and NLOAccess STRONG 2020 joint kick-off meeting, 8.11.2019. <https://indico.cern.ch/event/853688/contributions/3620725/>
- [13] A. Fomin, “Updates on IP2 FT layouts”, 21st meeting of the PBC-FT working group, 16.12.2020. <https://indico.cern.ch/event/981210/>
- [14] D. Mirarchi, A. Fomin, S. Redaelli, and W. Scandale, “Layouts for fixed-target experiments and dipole moment measurements of short-lived baryons using bent crystals at the LHC”, *The European Physical Journal C*, vol. 80, 10 2020.
- [15] G. Apollinari *et al.*, *High-Luminosity Large Hadron Collider (HL-LHC): Technical Design Report V. 0.1*, ser. CERN Yellow Reports: Monographs. Geneva: CERN, 2017. <https://cds.cern.ch/record/2284929>
- [16] R. W. Assmann *et al.*, “The final collimation system for the LHC”, p. 4 p, Jul 2006, revised version submitted on 2006-09-15 14:36:59. <http://cds.cern.ch/record/972336>
- [17] O. Aberler *et al.*, *High-Luminosity Large Hadron Collider (HL-LHC): Technical design report*, ser. CERN Yellow Reports: Monographs. Geneva: CERN, 2020. <https://cds.cern.ch/record/2749422>
- [18] LHC optics repository. https://abpdata.web.cern.ch/abpdata/lhc_optics_web/www/hllhc15/
- [19] K. Pressard, “Solid target design for ALICE”, Joint workshop ”GDR-QCD/QCD@short distances and STRONG2020/PARTONS/FTE@LHC/NLOAccess”, 2.06.2021. <https://indico.ijslab.in2p3.fr/event/7201/contributions/22534/>
- [20] H. Grote and F. Schmidt, “MAD-X: An Upgrade from MAD8”, no. CERN-AB-2003-024-ABP, p. 4 p, May 2003. <http://cds.cern.ch/record/618496>
- [21] G. Ripken and F. Schmidt, “A symplectic six-dimensional thin-lens formalism for tracking”, CERN, Geneva, Tech. Rep. CERN-SL-95-12. CERN-SL-95-12-AP. DESY-95-063, Apr 1995. <https://cds.cern.ch/record/281283>
- [22] *ICFA Mini-Workshop on Tracking for Collimation in Particle Accelerators: CERN, Geneva, Switzerland 30 Oct 2015. ICFA Mini-Workshop on Tracking for Collimation in Particle Accelerators*, CERN. Geneva: CERN, Dec 2018. <https://cds.cern.ch/record/2646800>
- [23] ALICE Fixed-Target Project meetings. <https://indico.cern.ch/category/11595/>
- [24] Physics Beyond Colliders Working Group. <https://indico.cern.ch/category/8815/>